



# Wi-Fi Extender 2600

Extend your existing wi-fi around your home using ultrafast dual-band 11ac 2600 technology. Perfect for all wi-fi devices.

## Wi-Fi doesn't reach?

Extend your wi-fi around your home

## Want dual-band reliability and speed?

Connect your 11ac dual-band Wi-Fi extender to your existing wireless broadband

## Prefer uninterrupted media streaming?

11ac dual-band Wi-Fi is ideal for downloading music, streaming HD content or for playing online games




## Main features

- Works with all broadband providers.
- Extends the range of your existing wi-fi.
- Gigabit Ethernet port for connecting devices.
- Connects to your hub or router with the push of a button.
- Easy set up with lights to help choose the best position.
- Dimable LED lights.
- Intelligently chooses between 2.4 or 5GHz bands to optimise your wi-fi experience.
- Supports UHD/HD video streaming.
- Builds a secure encrypted network - no need for configuration.
- Unique passwords for enhanced security.

Specification

Configuration	Simple push button configuration Web browser configuration interface	Power source	200-264V AC, 50/60Hz	Package content	11ac Dual-Band Wi-Fi Extender 2600
		Environment	Operating Temp:-10 to 45°C		Quick Start Guide
System requirements	Works with any operating systems		Operating Humidity: 10% to 90%		
Other features	192.168.1.1 or <a href="http://mybtdevice.home">http://mybtdevice.home</a> password: generate by production tools				
<b>Wireless Specification</b>					
Security	WPA2, Mixed mode (WPA + WPA2), None	Antennas	4x4 Dual-band (2.4GHz and 5GHz)		
		Transmission speeds	2.4GHz: 288.8Mbps (20MHz mode), 800Mbps (40MHz mode, 256-QAM)		
Wireless standards	IEEE 802.11a/b/g/n/ac		5GHz: 288.8Mbps (20MHz mode), 800Mbps (40MHz mode), 1733.3Mbps (80MHz, 256-QAM)		
<b>Extender Specification</b>					
Ports	1 x GigE RJ45 (10/100/1000Mbps)	Power consumption	In operation 10.1 Watts	Weight	331 grams
Buttons	Power (On/Off)		Network standby 5.5 Watts	Size	14.7 x 8.15 x 8.35 cm
	WPS		Off mode 0.2 Watts	Lights	RANGE 1-5, WPS (Blue)
	Link Reset (Pinhole)		Elapsed time to standby 5 minutes		Position indicators – Red: Too close & Too far, Blue: Good range

1. In ideal conditions

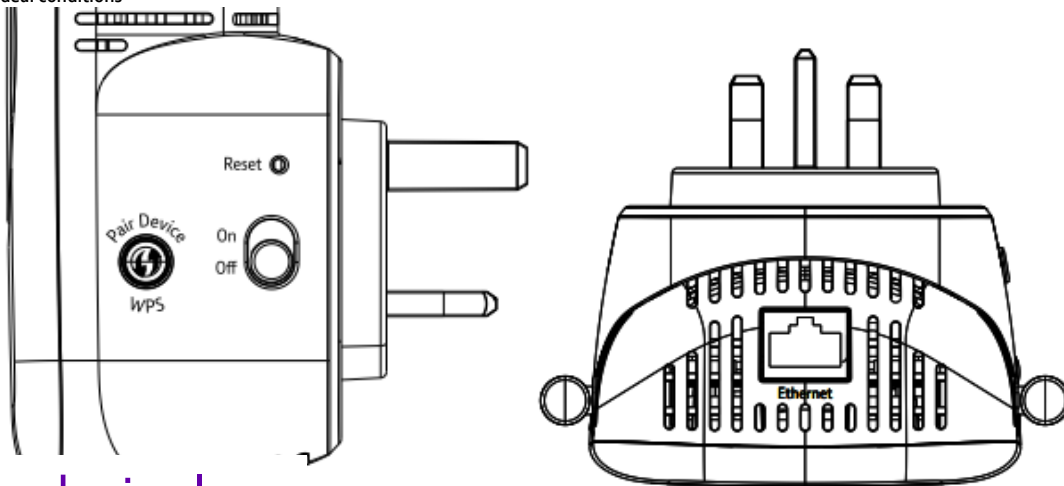

Technical support

Available from the BT Helpdesk on 0808 100 6116 or via the email link on the product page at [www.bt.com/producthelp](http://www.bt.com/producthelp)

Offices worldwide

The services described in this publication are subject to availability and may be modified from time to time. Services and equipment are provided subject to British Telecommunications plc's respective standard conditions of contract. Nothing in this publication forms any part of any contract.

© British Telecommunications plc 2018  
Registered office: 81 Newgate Street, London EC1A 7AJ. Registered in England No: 1800000.  
Template 1.0

Draft 1 / February 2018

Supplier data

	Dimensions H x W x D	Weight Empty / Complete	Manufactured in China Status – In development	
<b>Product</b>			<b>Item code</b>	<b>CSS codes</b>
Extender	14.7 x 8.15 x 8.35 cm	331 g	092657	TBC
<b>Gift box</b>			<b>Barcodes</b>	<b>Over pack barcodes</b>
Extender	16.3 x 19.0 x 10.3cm	110g / 600 g	5016351619971	05016351826072
<b>Over pack</b>			<b>Gift boxes per over pack</b>	<b>Pallet Ti's x Hi's</b>
Extender	43.7 x 39.7 x 35.3cm	640 g / 10.6kg	16	3 x 2 x 2, (12 cartons)

