



## User Guide

- 1 Plug in**
- 2 Add to your existing network**
- 3 Connect your devices**


### Wi-Fi Home Hotspot 500 Add-on

Follow the steps in this guide to set up your add-on.


If you need some help, see the Frequently Asked Questions at [bt.com/producthelp](http://bt.com/producthelp) or call 0808 100 6116\*.

\* Calls made from within the UK mainland network are free. Mobile and International call costs may vary.

### Check box content:



Wi-Fi Home  
Hotspot 500




Ethernet cable




### Find out more


- If you need more detailed instructions, Frequently Asked Questions are available at [bt.com/producthelp](http://bt.com/producthelp)
- If you cannot find the answer to your problem in the Frequently Asked Questions, then please call our free Helpline on **0808 100 6116\***. Our dedicated advisors are more likely to be able to help you than the retailer where you made your purchase.

# 1 Plug in

 TIP: you might find it easier to plug your new hotspot in the same double power socket or near one of your existing extenders whilst you set things up.


- 1 Plug the hotspot directly into a wall power socket near the device you want to connect. Make sure the power socket and extender are switched on.
- 2 Check the hotspot **On/Off** button on the top is switched on.

 **IMPORTANT:** to work properly the hotspot must be plugged directly into the wall socket and not into extension leads.

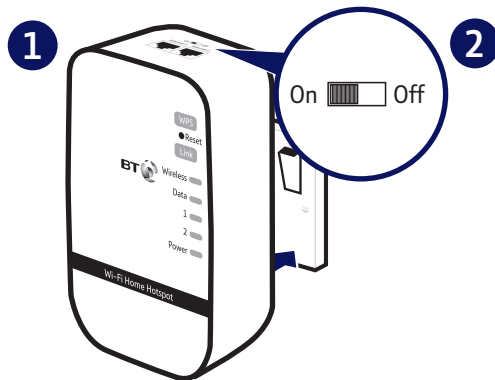

# 2 Add to your existing network

- 1 Press the **Link** button on the front for 5 to 8 seconds.
- 2 Wait for the device to restart. Give it a couple of minutes. If everything's okay the **Power** indicator will go back to steady green.
- 3 Press the **Link** button again, this time for 1 second.
- 4 Within 2 minutes, press the **Link** or equivalent button on any of the existing extenders for 1 second to complete the connection to the network.
- 5 Wait for connection to complete. Give it a couple of minutes. If everything's okay, the **Power** and **Data** indicators on your new hotspot will light up.

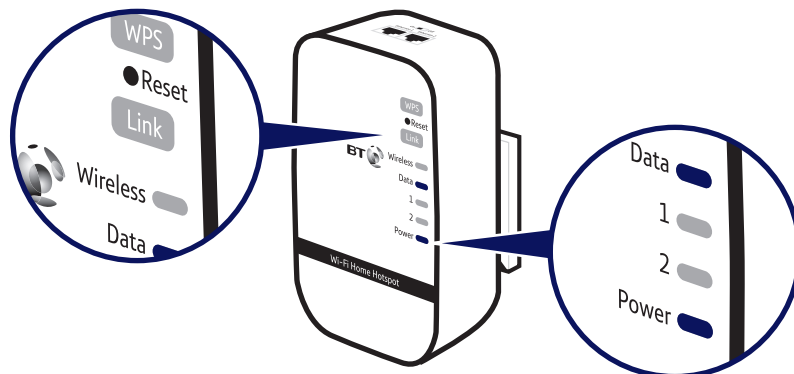


 See Connection help overleaf if the **Data** indicator doesn't light up on the hotspot.

## 3 Connect your devices

Connect your devices using wi-fi or the ethernet cable.


- ☰ You can connect separate devices to the ethernet ports and wi-fi at the same time.

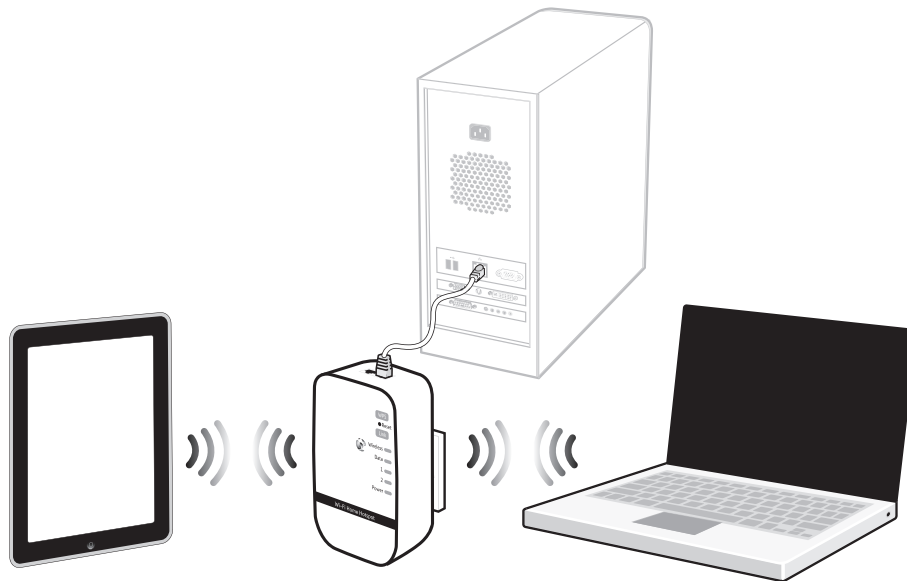

### To connect using wi-fi

- ☰ The hotspot name (SSID) and security key can be found on the pull-out card at the back of the hotspot.

The hotspot supports easy wi-fi connection with its WPS button. If your device also supports WPS, you can use it instead of the steps below so you don't have to enter the security key manually. Just follow the instructions on the device you're trying to connect to the hotspot.



- 1 Use the wireless connection software or settings on your device to display the list of available wireless networks in your area.
- 2 Find your hotspot in the list and select it; it's called **BTHomeSpot-XXX**.
- 3 Enter your hotspot's wireless key printed on the pull-out card.
- 4 Complete the connection on your device.

- ☰ Your new Wi-Fi Home Hotspot and your existing wireless broadband router will show up as two separate networks. If your device shows both networks, it's worth giving both of them a go as one might be faster and more reliable than the other.

### To connect using the ethernet cable

- 1 Connect your device to one of the ethernet ports on the hotspot.

- ☰ You'll need an ethernet cable for each device you want to connect to the hotspot.


# Light status

## Wi-Fi Home Hotspot

Light	Colour	Status	What's happening
Power	Green	On	Hotspot running normally
		Flashing	Hotspot resetting or synchronising
	-	Off	Hotspot turned off
Port 1 & 2	Green	On	Device connected to hotspot
	Green	Flashing	Data being sent or received
	-	Off	No device connected to hotspot or device switched off
Data	Green/ Orange/ Red	On	Hotspot connected to network Green: High transfer speed Orange: Medium transfer speed Red: Low transfer speed
		Off	Hotspot not connected to network
Wireless	Green	On	Wireless enabled, data is being transmitted/received
	-	Off	Wireless disabled
	Red/ Green	Flashing	WPS setup in progress (quicker flashing indicates WPS connection error)
	Red	On	Red for 30 seconds: WPS connection successful. Permanent red: wireless security turned off.

## Link & Reset Buttons


What do you want to do?	Press and hold
Prepare to join a new network	<b>Link</b> button for 5 to 8 seconds
Join a new network	<b>Link</b> button for 1 second
Reset to factory settings	<b>Reset</b> button for 1 second

 TIP: you may find it helpful to use a watch or a clock when using the Link button.

## Reset to factory settings


If your hotspot stops working or becomes unpaired, you can reset it to the factory settings.

- 1 Make sure the hotspot is plugged in and the power socket's switched on.
- 2 Press the **Reset** button for 1 second. Give it a couple of minutes. If everything's okay, the **Power** indicator will light up.

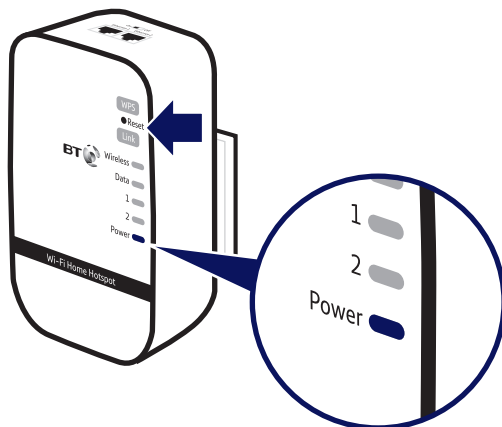

## 🔍 Connection help

📌 **IMPORTANT:** to work properly, hotspots must be plugged directly into the wall socket and not into extension leads.

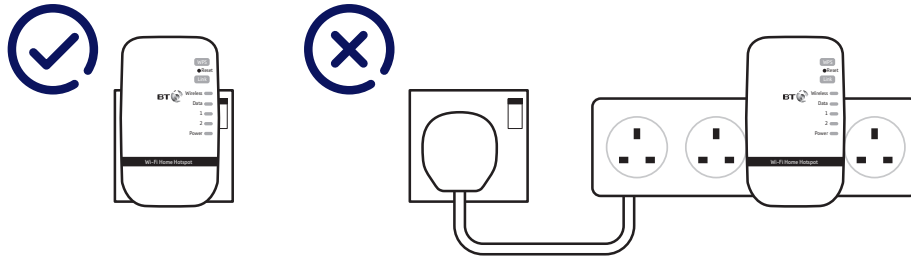

For advanced settings e.g. to change the name (SSID) of your hotspot check the Frequently Asked Questions at [bt.com/producthelp](https://bt.com/producthelp).

### Can't connect to hotspot using wi-fi

- Make sure you've used the correct wireless network and key details printed on the settings card.
- If you don't know how to view the list of wireless devices in your area to connect to the hotspot, see help provided with your device. Or check the Frequently Asked Questions on [bt.com/producthelp](https://bt.com/producthelp).

### Poor wi-fi performance

- The new Wi-Fi Home Hotspot and your existing wireless broadband router will show up as two separate networks. You may want to try both wi-fi networks as one might be faster and more reliable than the other.
- Do not use the hotspot in an area where microwave and electric equipment may interfere with the wireless signal.
- Try to move the device nearer to your hotspot, which can improve the wireless signal quality.
- Thick/concrete walls and ceilings may affect wi-fi.

### Data light is off or is red

- Swap devices to help check and isolate a problem with a particular broadband extender unit.
- To check if your home's electrical wiring is affecting your broadband extenders, try plugging units in the same room. Some old wiring or fuse boxes might affect your network performance.
- House appliances that draw large amounts of power, like refrigerators, freezers, microwaves and air conditioning systems, might cause interference with your network.
- For best network performance, use broadband extenders from BT.
- If there are no spare ports on your router/hub, you can unplug one of your existing devices and use an alternative like wi-fi or purchase a switch.



If you need more help, go to [bt.com/producthelp](https://bt.com/producthelp)  
or call **0808 100 6116\***.

# General information

For information on safety instructions, technical information or setting up the extender, please see the Frequently Asked Questions at [bt.com/producthelp](https://bt.com/producthelp)

## Guarantee

Your Wi-Fi Home Hotspot 500 Add-on is guaranteed for a period of 3 years from the date of purchase. Subject to the terms listed below, the guarantee will provide for the repair of, or at BT's or its agent's discretion, the option to replace the Wi-Fi Home Hotspot 500 Add-on or any component thereof which is identified as faulty or below standard, or as a result of inferior workmanship or materials. Products over 28 days old from the date of purchase may be replaced with a refurbished or repaired product.

The conditions of this guarantee are:

- the guarantee shall only apply to defects that occur within the 3 year guarantee period
- proof of purchase is required
- the equipment is returned to BT or its agent as instructed.

This guarantee does not cover any faults or defects caused by accidents, misuse, fair wear and tear, neglect, tampering with the equipment, or any attempt at adjustment or repair other than through approved agents.

This guarantee does not affect your statutory rights.

To find out what to do if your Add-on is in or outside of the 3 year guarantee, please see the Frequently Asked Questions at [bt.com/producthelp](https://bt.com/producthelp)

## How to recycle your equipment

The symbol shown here and on the product means that the product is classed as electrical or electronic equipment, so DO NOT put it in your normal rubbish bin.



It's all part of the Waste Electrical and Electronic Equipment (WEEE) Directive to recycle products in the best way – to be kinder to the planet, get rid of dangerous things more safely and bury less rubbish in the ground.

You should contact your retailer or supplier for advice on how to dispose of this product in an environmentally friendly way.

## R&TTE Directive & Declaration of Conformity

This equipment complies with the essential requirements for the Radio Equipment and Telecommunications Terminal Equipment Directive (1999/5/EC).

For a copy of the Declaration of Conformity please refer to [bt.com/producthelp](https://bt.com/producthelp)

This product uses open source codes available from [bt.com/help/gplcode](https://bt.com/help/gplcode)

## For a Better Future



We're always looking to make our products last longer and use less power, so we don't have such a big impact on the environment.

To find out about what we are doing, visit [bt.com/betterfuture](https://bt.com/betterfuture)

## Offices worldwide

The services described in this publication are subject to availability and may be modified from time to time. Services and equipment are supplied subject to British Telecommunications plc's respective standard conditions of contract. Nothing in this publication forms any part of a contract.

© British Telecommunications plc 2013.  
Registered Office: 81 Newgate Street, London EC1A 7AJ.  
Registered in England No. 1800000.

Designed and produced by The Art & Design Partnership Ltd.

Printed in China / Issue 3 / ADP09-13

